


370300 Accelerometer Transducer

Datasheet

Bently Nevada Machinery Condition Monitoring

115M8762 Rev. C

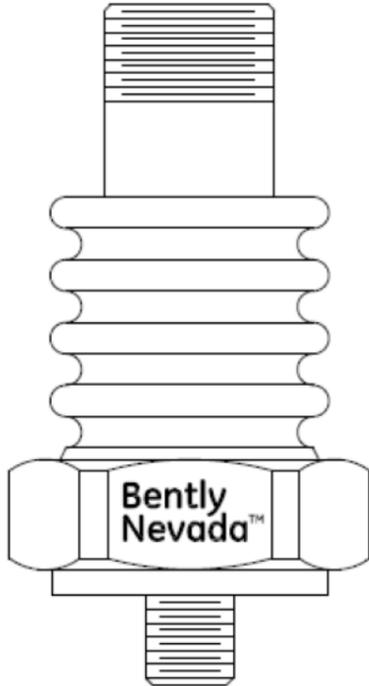

Description

The Bently Nevada 370300 accelerometers are designed to provide high electrical isolation between the base of the transducer and its internal electronics. This isolation offers greater protection against arcing/electrostatic discharge (ESD), as high as 6,000 volts. The transducer provides an amplitude range of 80 g peak and a sensitivity of 100 mV/g.



Most common machine malfunctions (unbalance, misalignment, etc.) occur on the rotor and originate as an increase (or at least a change) in rotor vibration. For any individual casing measurement to be effective for overall machine protection, the system must continually transmit a significant amount of rotor vibration to the machine casing, or mounting location of the transducer.

In addition, be careful to install the accelerometer transducer on the bearing housing or machine casing. Improper installation may decrease the transducer amplitude and frequency response and/or generate false signals that do not represent actual vibration. Refer to the appropriate instruction manuals and Application Notes.

Upon request, Bently Nevada provides engineering services that can identify the appropriate machine housing measurements and installation assistance if needed.



Specifications

Parameters are specified from +20 to +30°C (+68 to +86°F) unless otherwise specified.



Operation outside the specified limits may result in false readings or loss of machine monitoring.

Electrical

Sensitivity	10.2 mV/m/s ² (100 mV/g) ±5%, 25°C
Acceleration Range	80 g peak (784 m/sec ²)
Amplitude Non-linearity	±1% to 784 m/sec ² (80 g) peak.
Frequency Response	3 - 5kHz (180 - 300,000 CPM) ±5%
	1 - 7k Hz (60 - 420,000 CPM) ±10%
	0.5 - 12kHz (30 - 720,000 CPM) ±3dB
Resonance Frequency	25 kHz (1,500 kCPM)
Transverse Sensitivity, Max	5% of axial
Temperature Range	-40 to +248° F (-40 to +120° C)
Dielectric withstand voltage between connector and surface	6,000 VDC1 min
	5,000 VAC1 min
Electrical Noise	
Broadband 2.5 Hz to 25 kHz	700 µg (6.9 x 10 ⁻³ m/sec ²)

Spectral

10 Hz	10 µg/√Hz (9.8 x 10 ⁻⁵ m/sec ² /√Hz)
100 Hz	5 µg/√Hz (4.9 x 10 ⁻⁵ m/sec ² /√Hz)
1000 Hz	5 µg/√Hz (4.9 x 10 ⁻⁵ m/sec ² /√Hz)
Output Impedance	100 Ω

Impedance, between connector and base

DC	>100 Ω
100 Hz	>100 MΩ
1.0 kHz	>10 MΩ
10 kHz	>1 MΩ

Power Requirements

Excitation Voltage	+24Vdc nominal 18 ~ 30 Vdc
Regulated Current Range	3mA nominal 2 ~ 10 mA
Output Bias Voltage	+12VDC nominal
Grounding	Case isolated, internally shielded

Environmental Limits

Operating and Storage Temperature	-40°F to +248°F (-40°C to +120°C)
Temperature Response	-40°C -10% +120°C +10%
Shock Survivability	49,050 m/s ² (5000 g) peak, maximum.
Shock Limit, Mounted	2,000 g peak (19,600 m/sec ² peak)

Relative Humidity	100% condensing, non-submerged. Case is hermetically sealed.
Electromagnetic sensitivity, equiv g, max	70 $\mu\text{g/gauss}$ ($6.9 \times 10^{-4} \text{ m/sec}^2/\text{gauss}$)

Physical

Weight (no cable)	4.35 oz (122 g)
Diameter	2.54 in (64.4 mm), including mounting stud.
Height	2.3 in (59 mm), including mounting stud.
Connector	2-pin MIL-5015 Receptacle

Mounting Torque

Integral Mounting	$\frac{1}{4}$ - 28 UNF
Mounting Torque, recommended	30in-lb/3.4 N-m
Integral Mounting	M8 x 1.25
Mounting Torque, recommended	40in-lb/4.5 N-m
Integral Mounting	M6 x 1.00
Mounting Torque, recommended	30in-lb/3.4 N-m
Case Material	303 stainless steel
Mounting Angle	Any orientation
Sealing	hermetic

Base Strain Sensitivity	$<0.0002 \text{ g}/\mu\text{strain}$ ($<1.9 \times 10^{-3} \text{ m/sec}^2/\mu\text{strain}$)
Sensing Element Design	PZT, shear
Sensor Case Material	stainless steel
Isolation Material	ceramic
Recommended Cable Length	16 m (54 ft) Assuming max vibration of 80 g, frequency 12 kHz, and cable capacitance 200 pF/m. For longer lengths, contact Bently Nevada Tech Support .

Compliance and Certifications

FCC

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- This device may not cause harmful interference.
- This device must accept any interference received, including interference that may cause undesired operation.

EMC

EMC Directive 2014/30/EU

Ordering Information

370300-AA-BB Accelerometer

A: Mounting Thread Option

0 1	M8 X 1.25
0 2	¼-28 UNF
0 3	M6 x 1.0

B: Agency Approval Option

0 0	None
------------	------

Interconnect Cables

02173034	2- Conductor MIL-C-5015 shielded 0.382mm ² (22AWG) cable. The cable has a splash-proof boot over a female connector at the transducer end and is flush cut at the monitor end. The temperature range of the cable is -55° to 125 °C (-67° to 257°F). The cable is recommended for high electromagnetic noise environments and European Conformance (CE). The length of this cable is 32ft/10m.
----------	---

Accessories

115M8763	370300 Accelerometer User Guide
----------	---------------------------------

Graphs and Figures

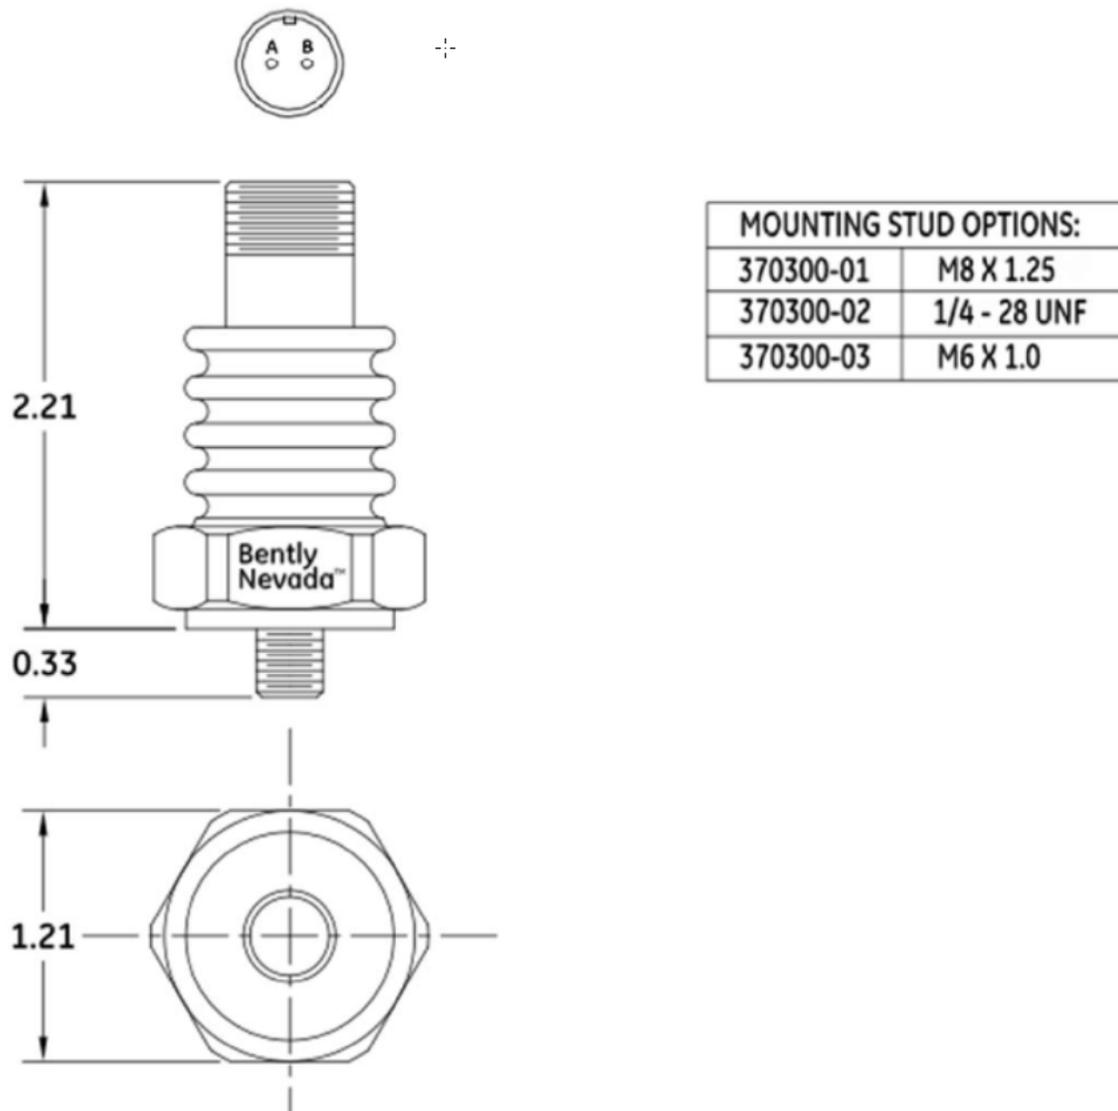


Figure 1: Acceleration Transducer Dimensional Drawing

Dimensions are in inches

Copyright 2022 Baker Hughes Company. All rights reserved.



Bently Nevada, M2 and Orbit Logo are registered trademarks of Bently Nevada, a Baker Hughes business, in the United States and other countries. The Baker Hughes logo is a trademark of Baker Hughes Company. All other product and company names are trademarks of their respective holders. Use of the trademarks does not imply any affiliation with or endorsement by the respective holders.

Baker Hughes provides this information on an "as is" basis for general information purposes. Baker Hughes does not make any representation as to the accuracy or completeness of the information and makes no warranties of any kind, specific, implied or oral, to the fullest extent permissible by law, including those of merchantability and fitness for a particular purpose or use. Baker Hughes hereby disclaims any and all liability for any direct, indirect, consequential or special damages, claims for lost profits, or third party claims arising from the use of the information, whether a claim is asserted in contract, tort, or otherwise. Baker Hughes reserves the right to make changes in specifications and features shown herein, or discontinue the product described at any time without notice or obligation. Contact your Baker Hughes representative for the most current information.

The information contained in this document is the property of Baker Hughes and its affiliates; and is subject to change without prior notice. It is being supplied as a service to our customers and may not be altered or its content repackaged without the express written consent of Baker Hughes. This product or associated products may be covered by one or more patents. See [Bentley.com/legal](https://www.bentley.com/legal).

1631 Bently Parkway South, Minden, Nevada USA 89423
Phone: 1.775.782.3611 (US) or [Bentley.com/support](https://www.bentley.com/support)
[Bentley.com](https://www.bentley.com)